


SD2c-G

45W•60W•85W

FEATURES

- Aluminium housing
- Powder coated for corrosion resistance
- Poly carbonate lens

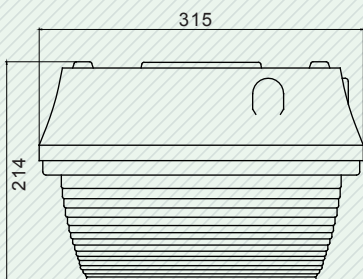

SUPPORTED LAMPS

- 45 watt bulb
- 60 watt bulb
- 85 watt bulb



APPLICATIONS

Warehouse, car parks, mines, shopping centres etc...



Luminaire No	Lamp No	Wattage (W)	Psu Frequency (Hz)	Input Voltage (V)	Input Current (A)	Ingress Protection
SD2c-G-40W	SD40W-QL	40W	50/60	240	0.19	IP43(ballast case)
SD2c-G-60W	SD60W-QL	60W	50/60	240	0.28	IP43(ballast case)
SD2c-G-85W	SD85W-QL	85W	50/60	240	0.40	IP43(ballast case)

"Creating Energy Saving Solutions for a Sustainable Future"