


## SD5b-G

85W•125W•155W•210W

### FEATURES

- Square profile aluminium housing
- Anodised aluminium reflector
- High temperature resistant tempered glass lens
- Silicone seal for High IP Protection

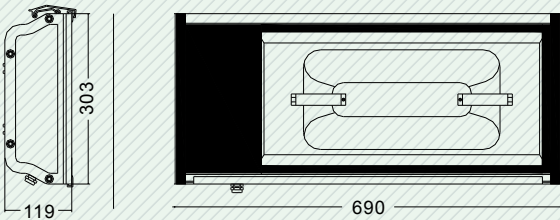

### SUPPORTED LAMPS

- 85 watt square
- 125 watt square
- 155 watt square
- 210 watt square



### APPLICATIONS

Tunnels, roadway lighting etc...

Luminaire No	Lamp No	Wattage (W)	Psu Frequency (Hz)	Input Voltage (V)	Input Current (A)	Ingress Protection
SD5b-G-85W	SD85W-F-G	85W	50/60	240	0.40	IP65(ballast case)
SD5b-G-125W	SD125W-F-G	125W	50/60	240	0.57	IP65(ballast case)
SD5b-G-155W	SD155W-F-G	155W	50/60	240	0.65	IP65(ballast case)
SD5b-G-210W	SD210W-F-G	210W	50/60	240	0.97	IP65(ballast case)

"Creating Energy Saving Solutions for a Sustainable Future"